


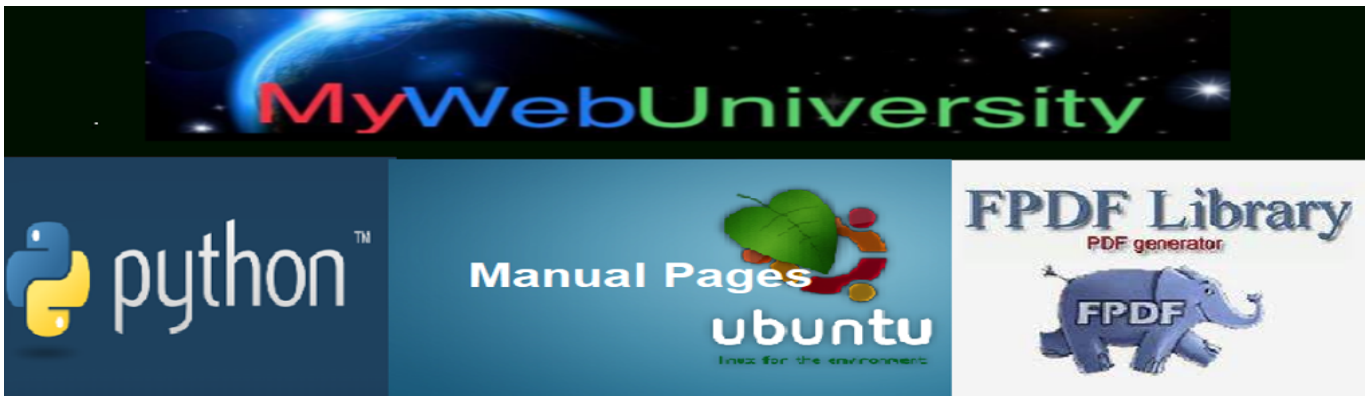

Full credit is given to the above companies including the Operating System (OS) that this PDF file was generated!

Rocky Enterprise Linux 9.2 Manual Pages on command 'XtAppSetExitFlag.3'

\$ man XtAppSetExitFlag.3

XtAppSetExitFlag(3) XT FUNCTIONS XtAppSetExitFlag(3)

NAME

XtAppSetExitFlag, XtAppGetExitFlag - thread support functions

SYNTAX

```
#include <X11/Intrinsic.h>
```

```
void XtAppSetExitFlag(XtAppContext app_context);
```

```
Boolean XtAppGetExitFlag(XtAppContext app_context);
```

ARGUMENTS

app_context

Specifies the application context.

DESCRIPTION

To indicate that an application context should exit, use XtAppSetExitFlag.

To test the exit status of an application context, use XtAppGetExitFlag.

SEE ALSO

X Toolkit Intrinsics - C Language Interface

X Version 11

libXt 1.2.1

XtAppSetExitFlag(3)