


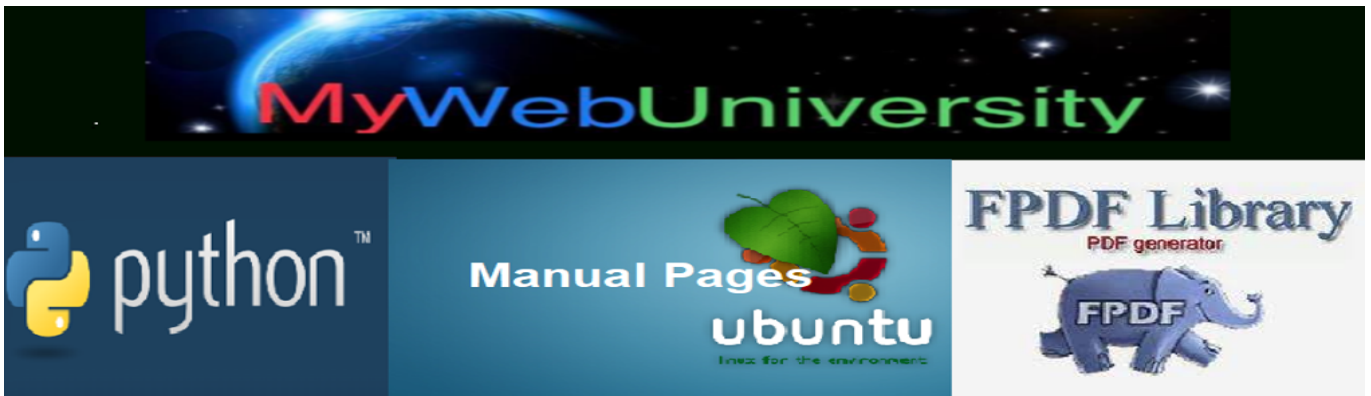

Full credit is given to the above companies including the Operating System (OS) that this PDF file was generated!

Rocky Enterprise Linux 9.2 Manual Pages on command 'arptables-nft-save.8'

\$ man arptables-nft-save.8

ARPTABLES-SAVE(8)

ARPTABLES-SAVE(8)

NAME

arptables-save - dump arptables rules to stdout (nft-based)

SYNOPSIS

arptables-save [-M modprobe] [-c]

arptables-save [-V]

DESCRIPTION

arptables-save is used to dump the contents of an ARP Table in easily parseable format to STDOUT. Use I/O-redirection provided by your shell to write to a file.

-M, --modprobe modprobe_program

Specify the path to the modprobe program. By default, arptables-save will inspect /proc/sys/kernel/modprobe to determine the executable's path.

-c, --counters

Include the current values of all packet and byte counters in the output.

-V, --version

Print version information and exit.

AUTHOR

Jesper Dangaard Brouer <brouer@redhat.com>

SEE ALSO

arptables-restore(8), arptables(8)

March 2019

ARPTABLES-SAVE(8)