


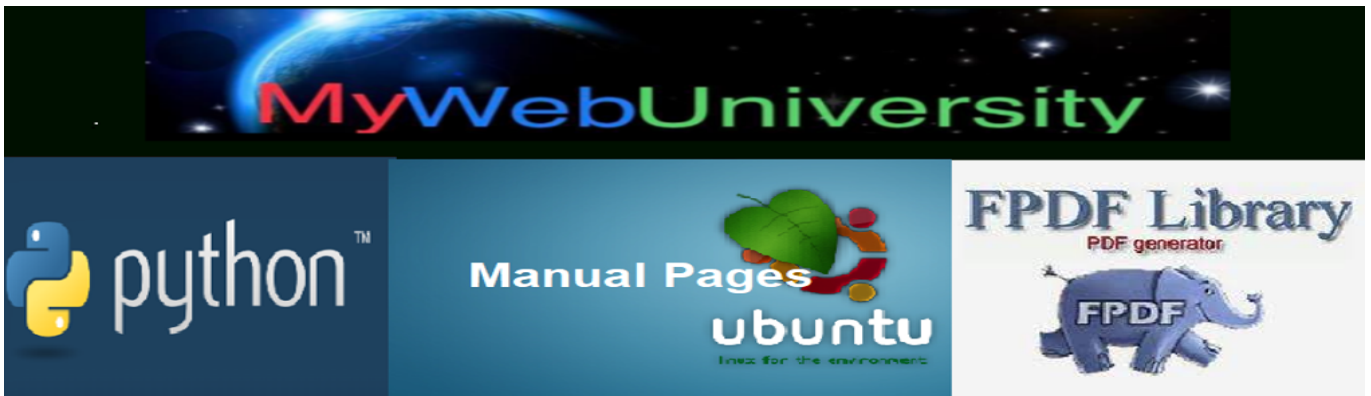

Full credit is given to the above companies including the Operating System (OS) that this PDF file was generated!

Rocky Enterprise Linux 9.2 Manual Pages on command 'cosl.3'

\$ man cosl.3

COS(3) Linux Programmer's Manual COS(3)

NAME

cos, cosf, cosl - cosine function

SYNOPSIS

```
#include <math.h>
```

```
double cos(double x);
```

```
float cosf(float x);
```

```
long double cosl(long double x);
```

Link with -lm.

Feature Test Macro Requirements for glibc (see feature_test_macros(7)):

cosf(), cosl():

```
_ISOC99_SOURCE || _POSIX_C_SOURCE >= 200112L
```

```
|| /* Since glibc 2.19: */ _DEFAULT_SOURCE
```

```
|| /* Glibc versions <= 2.19: */ _BSD_SOURCE || _SVID_SOURCE
```

DESCRIPTION

These functions return the cosine of x, where x is given in radians.

RETURN VALUE

On success, these functions return the cosine of x.

If x is a NaN, a NaN is returned.

If x is positive infinity or negative infinity, a domain error occurs, and a NaN is returned.

ERRORS

See math_error(7) for information on how to determine whether an error has occurred when

calling these functions.

The following errors can occur:

Domain error: x is an infinity

errno is set to EDOM (but see BUGS). An invalid floating-point exception (FE_IN?VALID) is raised.

ATTRIBUTES

For an explanation of the terms used in this section, see attributes(7).

??

?Interface ? Attribute ? Value ?

??

?cos(), cosf(), cosl() ? Thread safety ? MT-Safe ?

??

CONFORMING TO

C99, POSIX.1-2001, POSIX.1-2008.

The variant returning double also conforms to SVr4, 4.3BSD.

BUGS

Before version 2.10, the glibc implementation did not set errno to EDOM when a domain error occurred.

SEE ALSO

acos(3), asin(3), atan(3), atan2(3), ccos(3), sin(3), sincos(3), tan(3)

COLOPHON

This page is part of release 5.10 of the Linux man-pages project. A description of the project, information about reporting bugs, and the latest version of this page, can be found at <https://www.kernel.org/doc/man-pages/>.

2017-09-15

COS(3)