


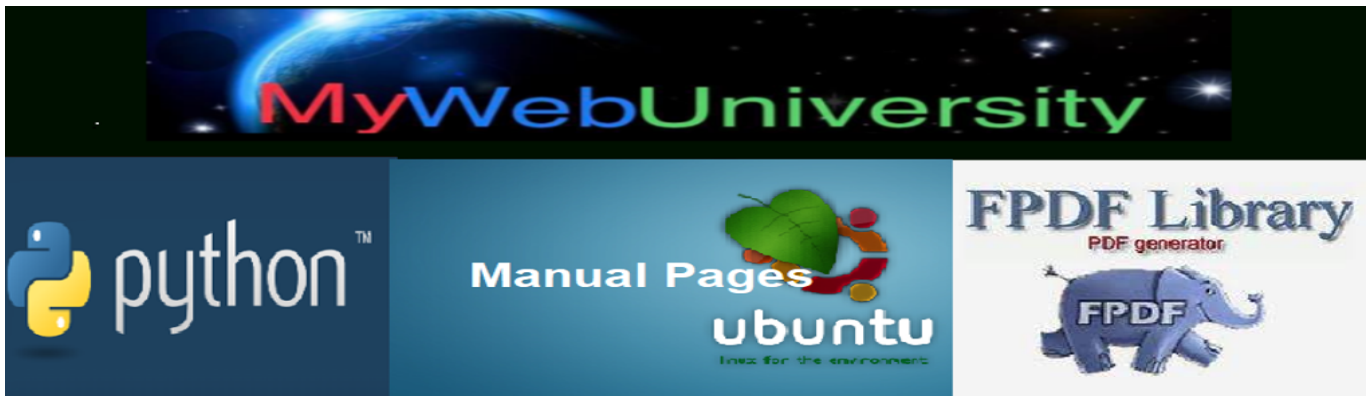

Full credit is given to the above companies including the Operating System (OS) that this PDF file was generated!

Rocky Enterprise Linux 9.2 Manual Pages on command 'dmmp_context_timeout_set.3'

\$ man dmmp_context_timeout_set.3

dmmp_context_timeout_set(3)Device Mapper Multipath API - libdmmp Manuadmmp_context_timeout_set(3)

NAME

dmmp_context_timeout_set - Set IPC timeout.

SYNOPSIS

```
void dmmp_context_timeout_set (struct dmmp_context *ctx, unsigned int tmo);
```

ARGUMENTS

ctx Pointer of 'struct dmmp_context'. If this pointer is NULL, your program will be terminated by assert.

tmo Timeout in milliseconds(1 seconds equal 1000 milliseconds). 0 means infinite, function only return when error or pass.

DESCRIPTION

By default, the IPC to multipathd daemon will timeout after 60 seconds.

RETURN

void