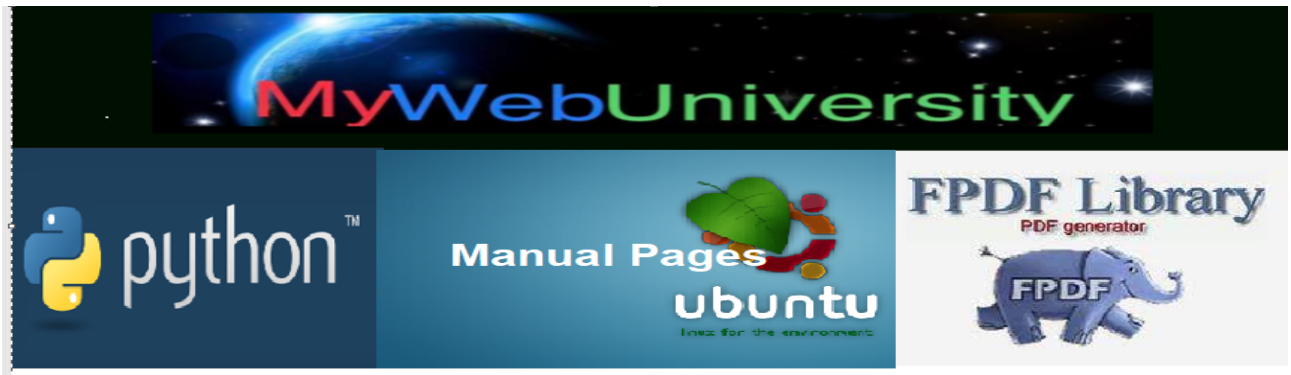

Full credit is given to the above companies including the OS that this PDF file was generated!

Linux Ubuntu 26.04 Manual Pages on command 'git-symbolic-ref.1'

$ man git-symbolic-ref.1

GIT-SYMBOLIC-REF(1) Git Manual GIT-SYMBOLIC-REF(1)

NAME

git-symbolic-ref - Read, modify and delete symbolic refs

SYNOPSIS

git symbolic-ref [-m <reason>] <name> <ref>

git symbolic-ref [-q] [--short] [--no-recurse] <name>

git symbolic-ref --delete [-q] <name>

DESCRIPTION

Given one argument, reads which branch head the given symbolic ref refers to and outputs its path, relative to the .git/ directory. Typically you would give HEAD as the <name> argument to see which branch your working tree is on.

Given two arguments, creates or updates a symbolic ref <name> to point at the given branch <ref>.

Given --delete and an additional argument, deletes the given symbolic ref.

A symbolic ref is a regular file that stores a string that begins with ref: refs/. For example, your .git/HEAD is a regular file whose content is ref: refs/heads/master.

OPTIONS

-d, --delete

Delete the symbolic ref <name>.

-q, --quiet

Do not issue an error message if the <name> is not a symbolic ref but a detached HEAD; instead exit with non-zero status silently.

--short

When showing the value of <name> as a symbolic ref, try to shorten the value, e.g. from refs/heads/master to master.

--recurse, --no-recurse

When showing the value of <name> as a symbolic ref, if <name> refers to another symbolic ref, follow such a chain of symbolic refs until the result no longer points at a symbolic ref (--recurse, which is the default). --no-recurse stops after dereferencing only a single level of symbolic ref.

-m

Update the reflog for <name> with <reason>. This is valid only when creating or updating a symbolic ref.

NOTES

In the past, .git/HEAD was a symbolic link pointing at refs/heads/master. When we wanted to switch to another branch, we did ln -sf refs/heads/newbranch .git/HEAD, and when we wanted to find out which branch we are on, we did readlink .git/HEAD. But symbolic links are not entirely portable, so they are now deprecated and symbolic refs (as described above) are used by default.

git symbolic-ref will exit with status 0 if the contents of the symbolic ref were printed correctly, with status 1 if the requested name is not a symbolic ref, or 128 if another error occurs.

SEE ALSO

git-update-ref(1)

GIT

Part of the git(1) suite